

GRAVILLON 4/20 mm NF



Péetrographie : CALCAIRE DUR VISEEN
Elaboration : TERTIAIRE

Partie contractuelle

Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire

4 20

Norme

Norme NF P 18-545 Article 10

Code

A (01/01/2012)


	0.063	0.5	d/2 2	d 4	6.3	8	D/2 10	12.5	14	16	D 20	1.4D 28	31.5	40	2D	FI
Etendue e	2		5	10			35				9	2			0	
Incertitude U	0.3		1	5			6				5	1			0	4
V.S.S.+U	2.3		6	15			71				100	100			100	24.00
V.S.S.	2.0		5	10			65				99	100			100	20.00
V.S.I.	0.0		0	0			30				90	98			100	
V.S.I.-U	0.0		0	0			24				85	97			100	
Ecart-type max	0.61		1.52	3.03			10.61				2.73	0.61			0.00	

Partie informative

Résultats de production

du 09/01/18 au 28/06/18

	0.063	0.5	2	4	6.3	8	10	12.5	14	16	20	28	31.5	40	FI
Maximum	1.7	3	4	8	30	44	57	74	84	90	98	100	100	100	15.00
Xf+1.25xEcart-types	1.5	2	3	5	26	41	54	69	79	87	98	100	100	100	
Moyenne Xf	1.2	1	2	3	19	33	47	63	73	83	95	100	100	100	13.43
Xf-1.25xEcart-types	0.8	1	1	2	12	26	40	57	67	79	93	100	100	100	
Minimum	0.5	1	1	1	10	23	37	53	64	75	91	99	99	100	11.00
Ecart-type	0.27	0.4	0.7	1.4	5.5	6.0	5.8	5.1	4.7	3.5	2.0	0.1	0.1	0.0	1.178
Nombre de résultats	48	48	48	48	48	48	48	48	48	48	48	48	48	48	7

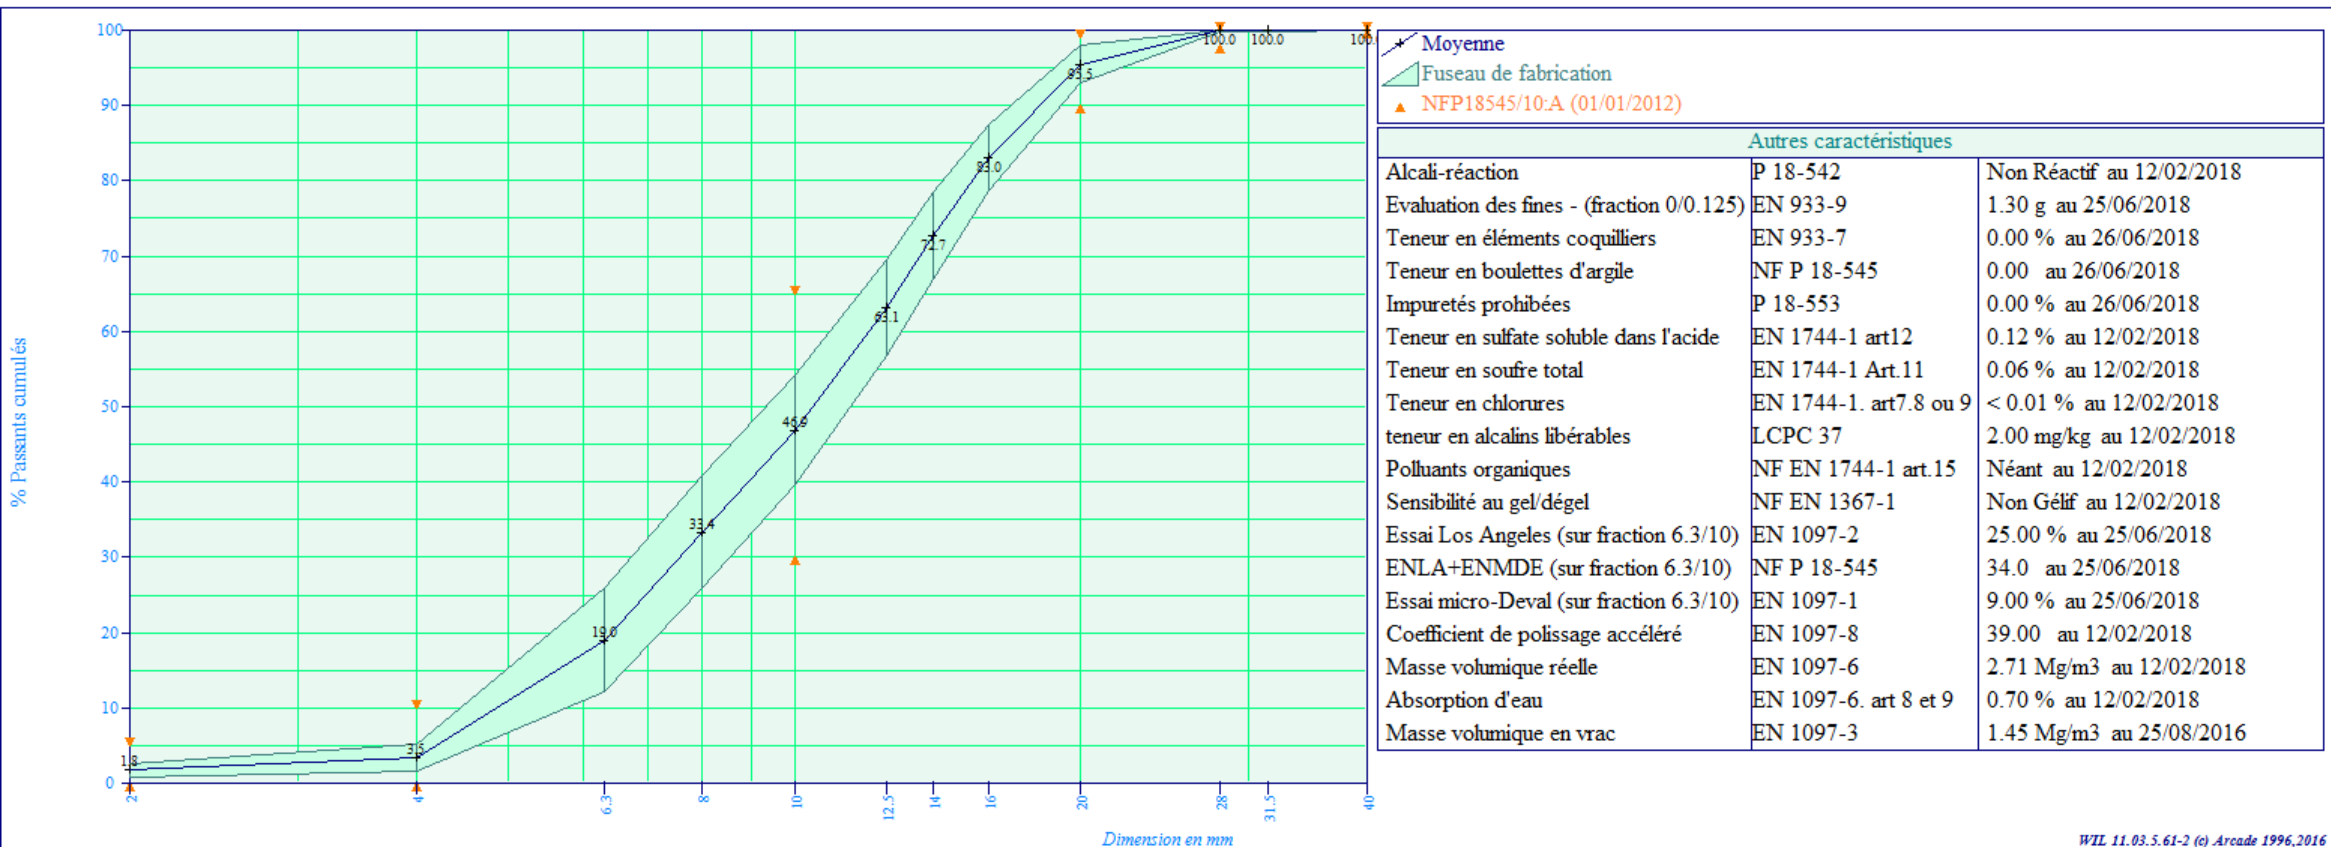

WIL 11.03.5.61-2 (c) Arcade 1996,2016

le Responsable Laboratoire

E. COLIN