

GRAVILLON 4/10 mm



Péetrographie : CALCAIRE DUR VISEEN

Partie contractuelle

Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire

4 10

Norme

Norme NF P 18-545 Article 7

Code

C III (01/01/2012)


	0.063	0.5	d/2 2	d 4	5	6.3	D/1.4 7.1	8	D 10	12.5	1.4D 14	16	2D 20	FI
Etendue e	2		5	10			30		10		2		0	
Incertitude U	0.3		1	5			12		5		1		1	4
V.S.S.+U	2.3		6	16			72		100		100		100	24.00
V.S.S.	2.0		5	11			60		95		100		100	20.00
V.S.I.	0.0		0	1			30		85		98		100	
V.S.I.-U	0.0		0	0			18		80		97		99	
Ecart-type max	0.61		1.52	3.03			9.09		3.03		0.61		0.00	

Partie informative

Résultats de production

du 09/01/18 au 28/06/18

	0.063	0.5	2	4	5	6.3	7.1	8	10	12.5	14	16	20	FI
Maximum	2.0	3	4	10	24	49	60	76	94	100	100	100	100	20.00
Xf+1.25xEcart-types	1.8	2	3	7	20	42	55	69	92	100	100	100	100	
Moyenne Xf	1.4	2	2	5	14	33	46	60	89	100	100	100	100	17.38
Xf-1.25xEcart-types	1.0	1	1	2	8	23	37	51	87	100	100	100	100	
Minimum	0.5	1	1	2	7	21	34	47	85	99	100	100	100	14.00
Ecart-type	0.30	0.4	0.8	2.0	4.7	7.3	7.3	6.9	2.1	0.2	0.0	0.0	0.0	1.867
Nombre de résultats	55	55	55	55	55	55	55	55	55	55	55	55	55	8

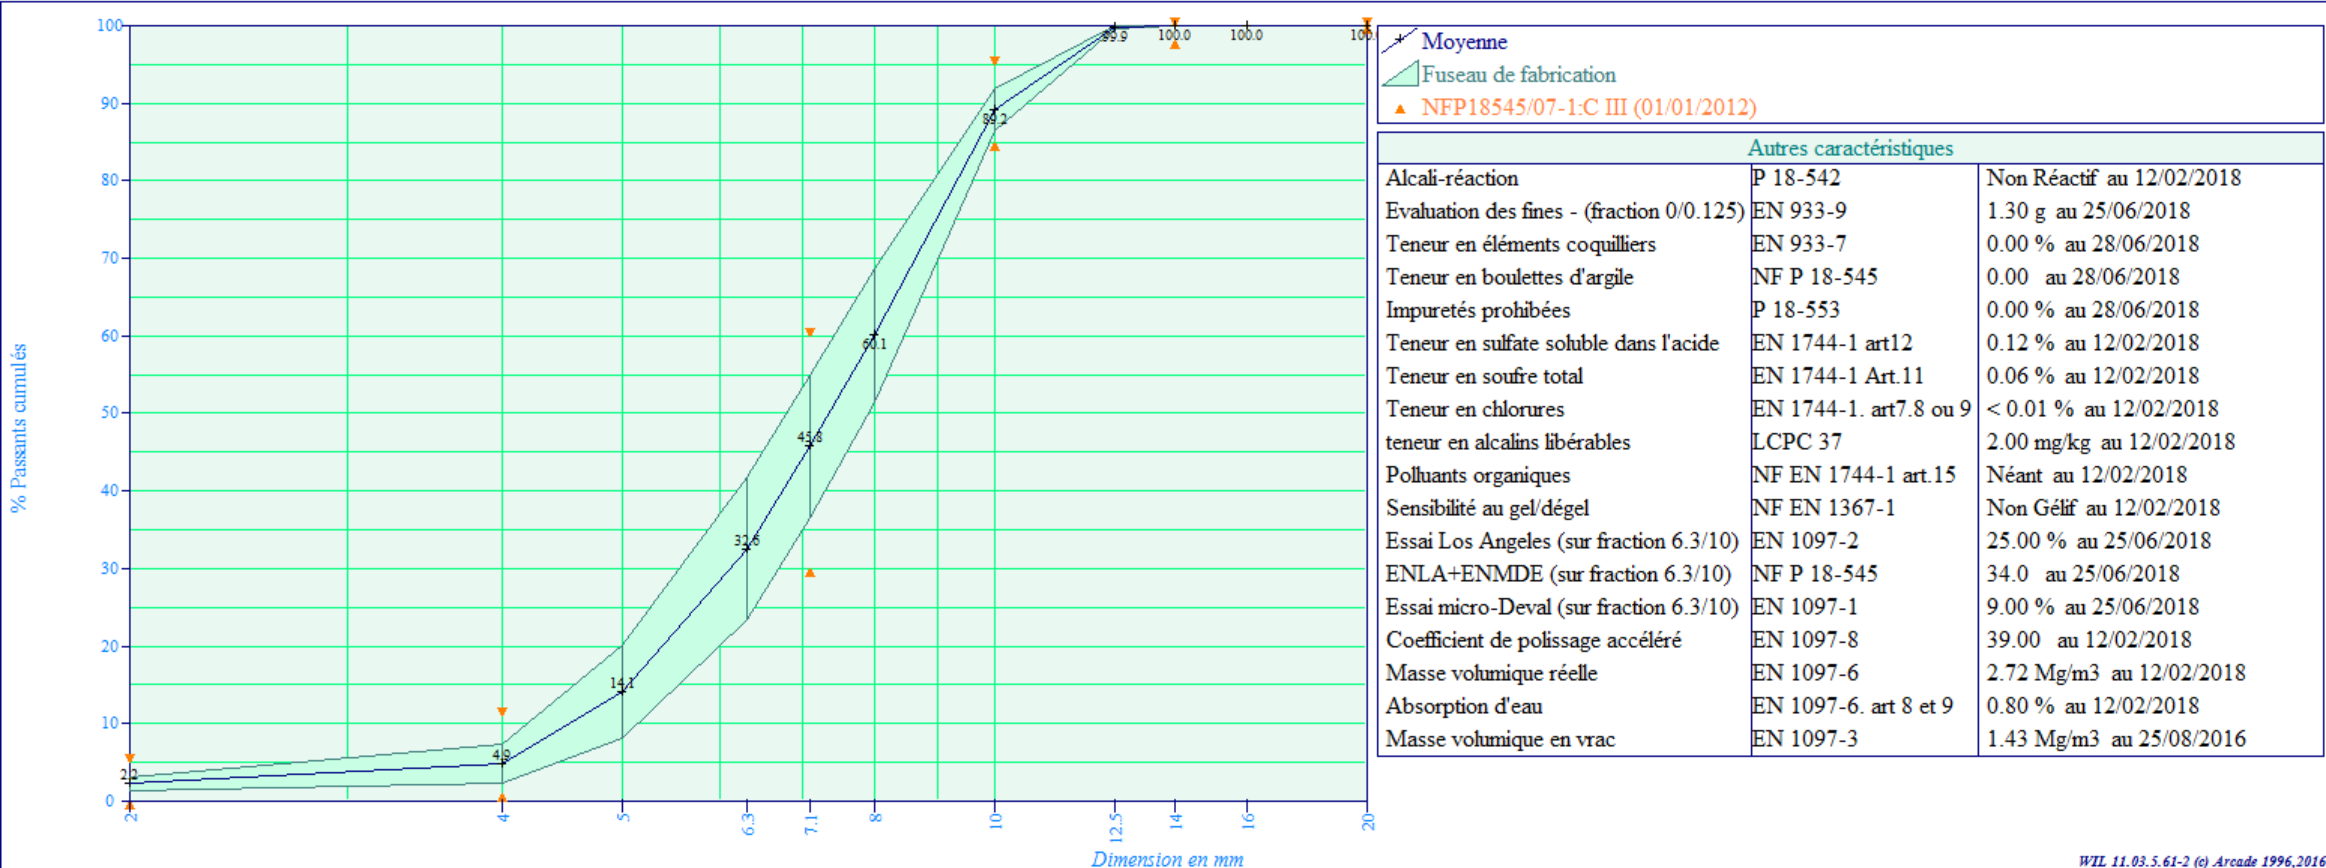

WZL 11.03.5.61-2 (c) Arcade 1996,2016

le Responsable Laboratoire

E. COLIN