

## GRAVILLON 20/31.5 mm LAVE



**Péetrographie :** CALCAIRE DUR VISEEN  
**Elaboration :** TERTIAIRE

### Partie contractuelle

Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire

Norme

Code

20 31.5

Norme NF P 18-545 Article 10

A (01/07/2012)


	d/2		d								D		1.4D	2D	FI
	0.063	0.5	10	12.5	14	16	20	22.4	25	28	31.5	40	45	63	
Etendue e	1.5		5				10				10		2	0	
Incertitude U	0.3		1				5				5		1	0	4
V.S.S.+U	1.8		6				17				99		100	100	24.00
V.S.S.	1.5		5				12				94		100	100	20.00
V.S.I.	0.0		0				2				84		98	100	
V.S.I.-U	0.0		0				0				79		97	100	
Ecart-type max	0.45		1.52				3.03				3.03		0.61	0.00	

### Partie informative

Résultats de production

du 02/07/18 au 10/12/18

	0.063	0.5	10	12.5	14	16	20	22.4	25	28	31.5	40	45	63	FI
Maximum	0.8	1	1	1	2	3	8	26	52	78	93	100	100	100	12.00
Xf+1.25xEcart-types	0.7	1	1	1	1	2	6	20	48	74	92	100	100	100	
Moyenne Xf	0.5	1	1	1	1	1	4	14	39	65	89	100	100	100	7.17
Xf-1.25xEcart-types	0.4	0	0	0	0	0	2	8	30	56	85	100	100	100	
Minimum	0.2	0	0	0	0	0	2	6	24	49	84	99	100	100	3.00
Ecart-type	0.13	0.2	0.2	0.3	0.3	0.5	1.6	4.7	7.3	7.1	2.7	0.2	0.0	0.0	2.911
Nombre de résultats	32	32	32	32	32	32	32	32	32	32	32	32	32	32	6

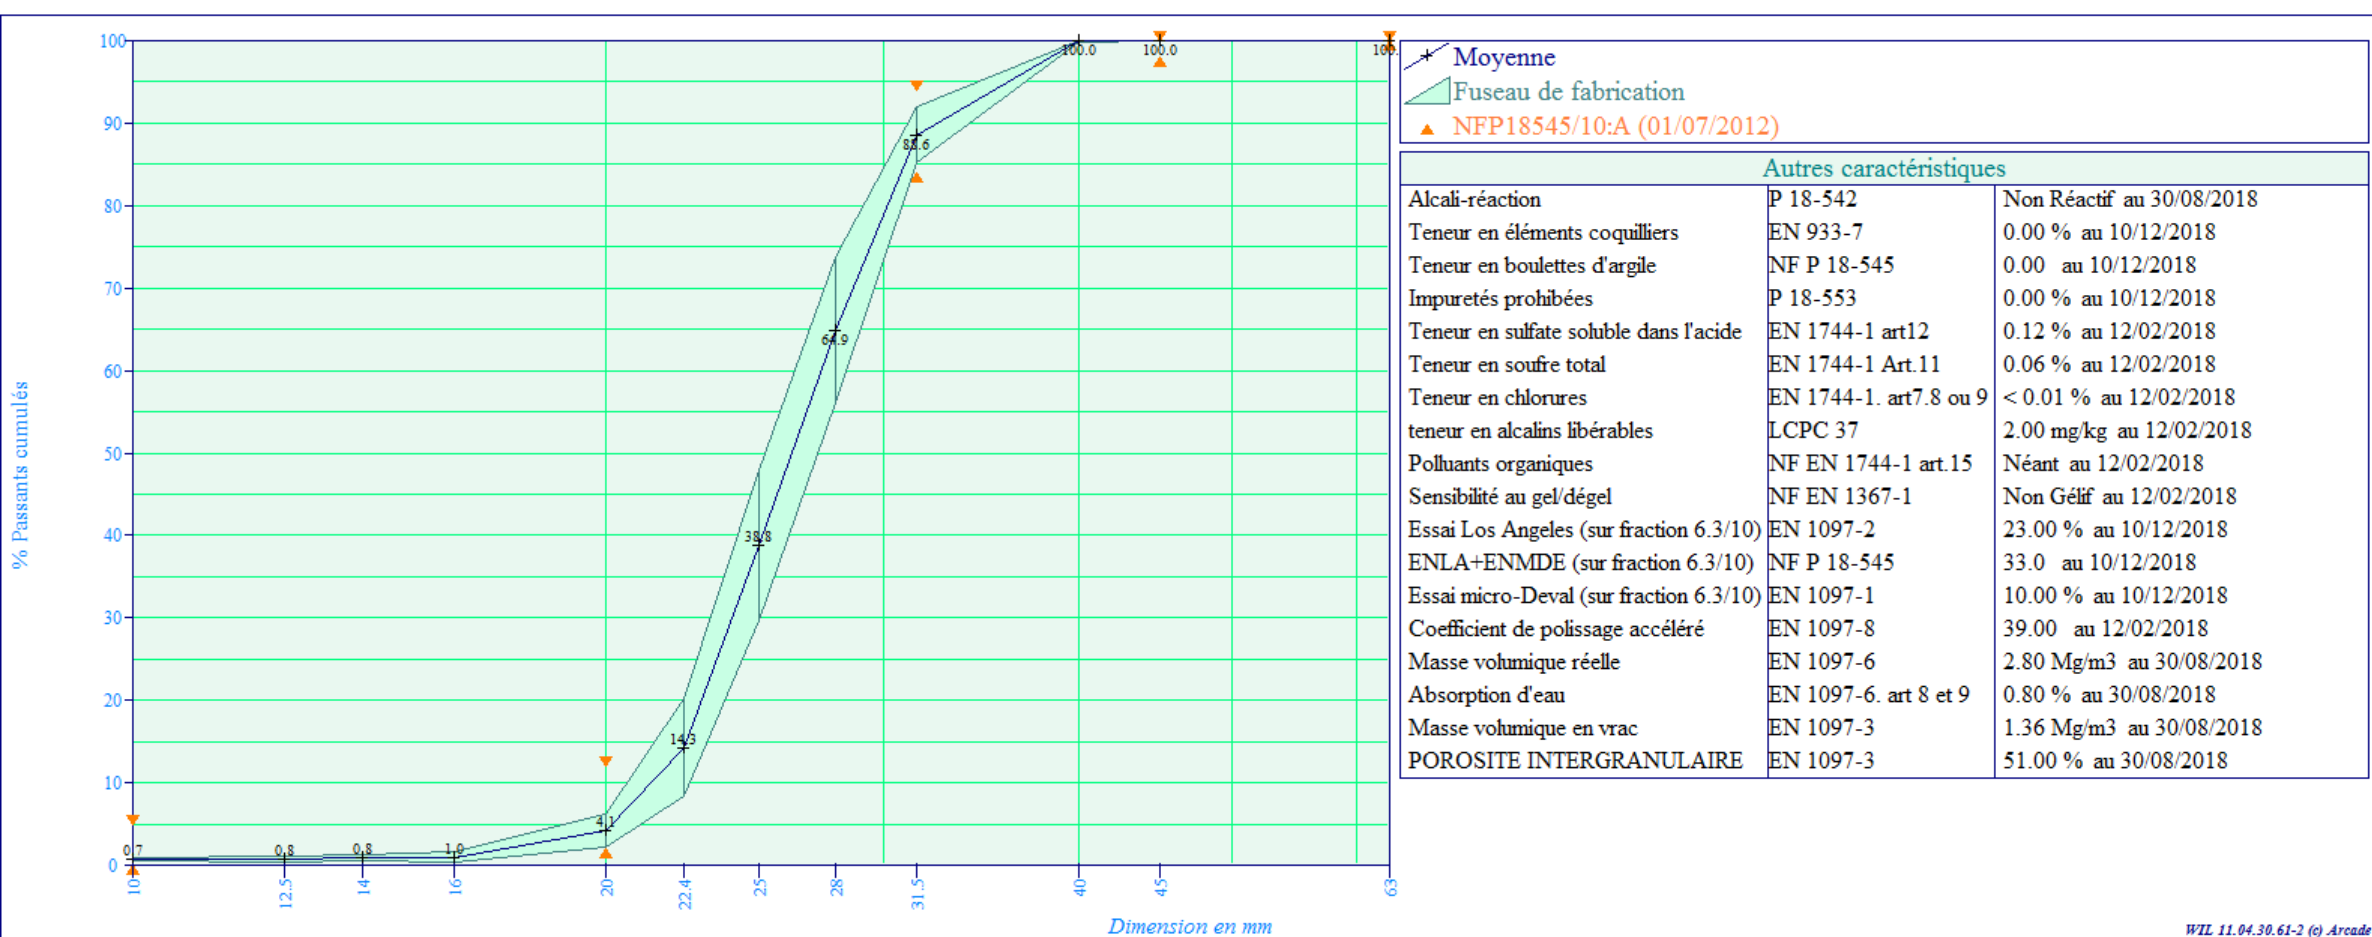

le Responsable Laboratoire

E. COLIN