

GRAVILLON 4/14 mm



Péetrographie : CALCAIRE DUR VISEEN

Partie contractuelle

Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire

4 14

Norme

Norme NF P 18-545 Article 7

Code

C III (01/01/2012)


	0.063	0.5	d/2 2	d 4	6.3	8	D/1.4 10	12.5	D 14	16	1.4D 20	2D 28	FI
Etendue e	2		5	10			30		9		2	0	
Incertitude U	0.3		1	5			6		5		1	0	4
V.S.S.+U	2.3		6	16			76		100		100	100	24.00
V.S.S.	2.0		5	11			70		99		100	100	20.00
V.S.I.	0.0		0	1			40		90		98	100	
V.S.I.-U	0.0		0	0			34		85		97	100	
Ecart-type max	0.61		1.52	3.03			9.09		2.73		0.61	0.00	

Partie informative

Résultats de production

du 10/07/18 au 11/12/18

	0.063	0.5	2	4	6.3	8	10	12.5	14	16	20	28	FI
Maximum	1.7	2	3	8	40	59	70	87	97	100	100	100	19.00
Xf+1.25xEcart-types	1.7	2	3	7	38	54	68	87	95	100	100	100	
Moyenne Xf	1.4	2	2	5	32	47	62	83	93	100	100	100	16.86
Xf-1.25xEcart-types	1.1	1	2	3	25	41	55	79	91	99	100	100	
Minimum	1.0	1	2	2	25	42	53	75	90	99	100	100	14.00
Ecart-type	0.26	0.2	0.5	1.8	5.2	5.3	5.1	3.5	1.7	0.4	0.0	0.0	2.100
Nombre de résultats	16	16	16	16	16	16	16	16	16	16	16	16	14

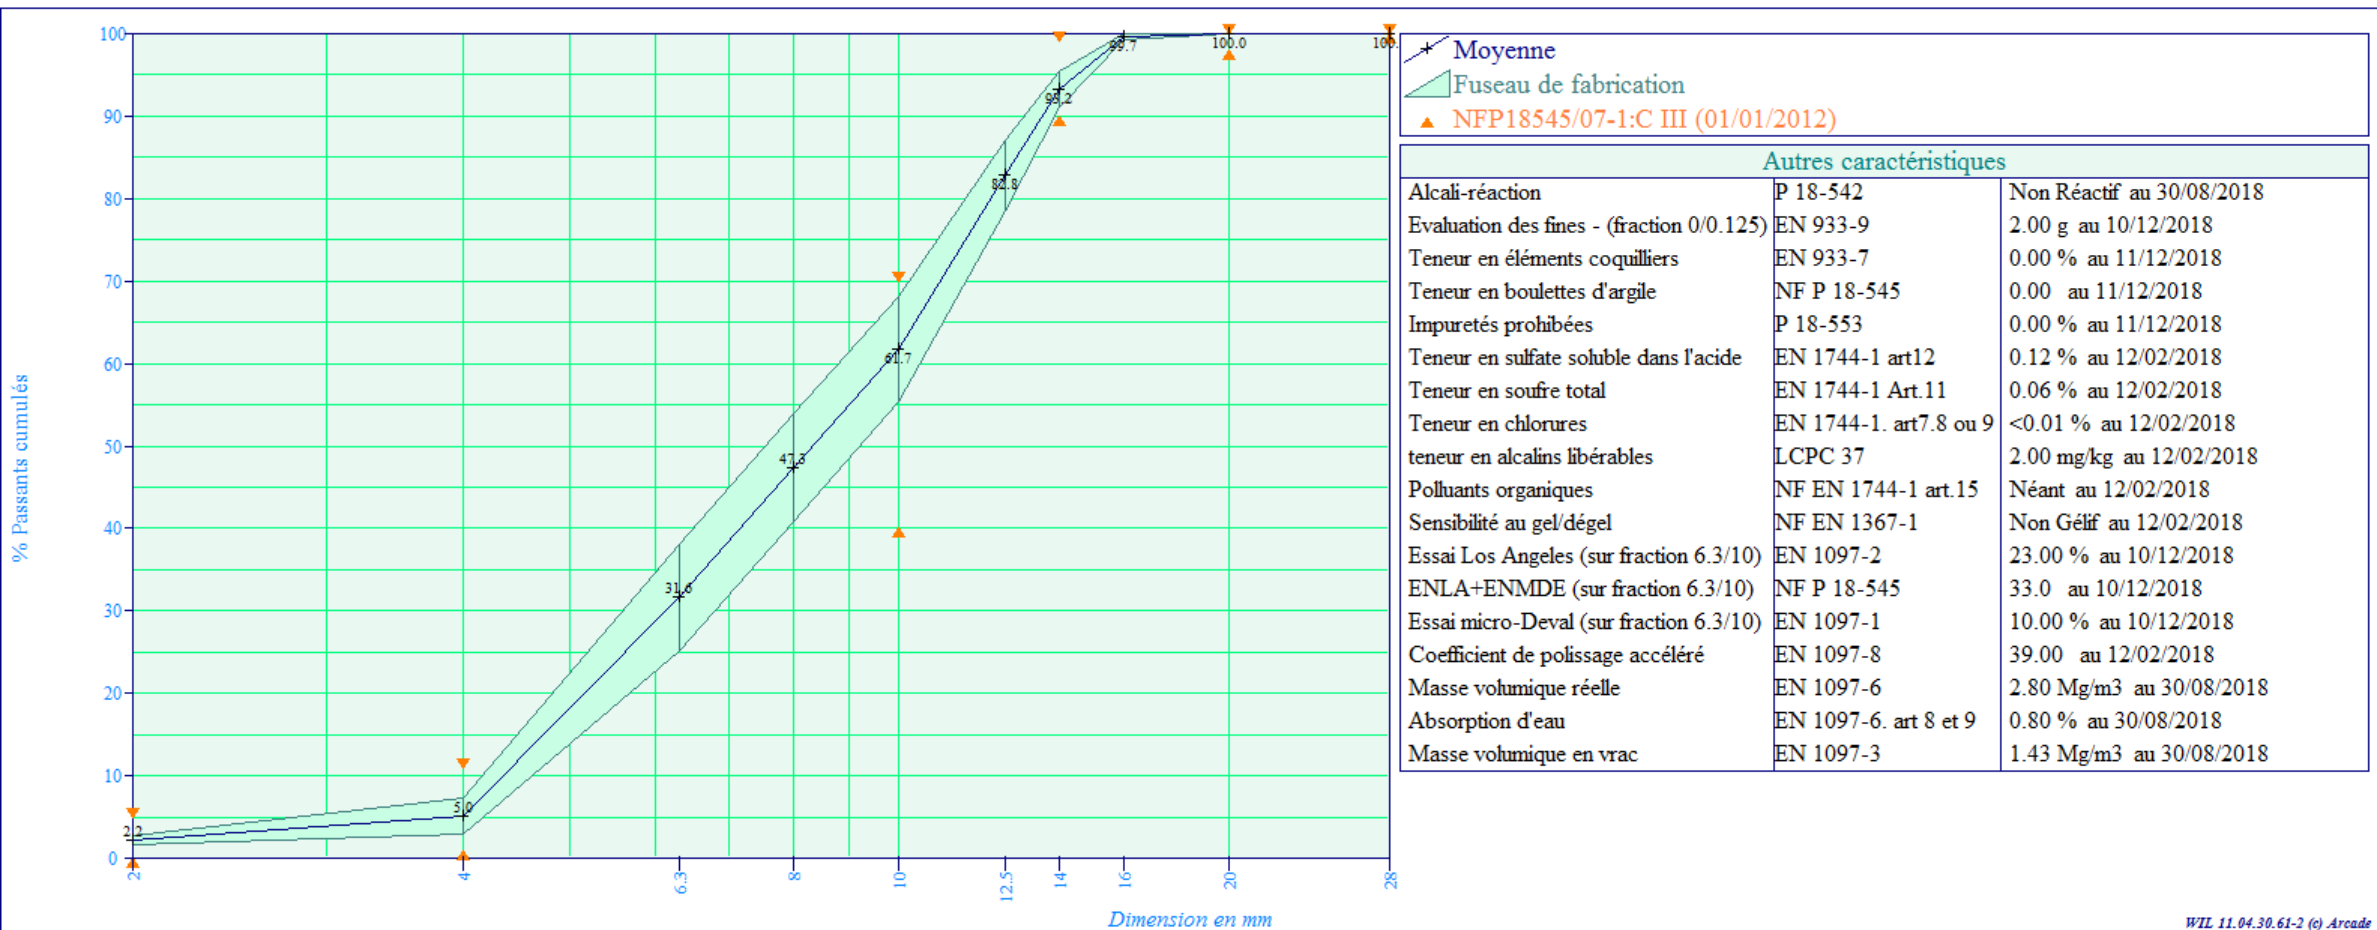

le Responsable Laboratoire

E. COLIN