


0/14 SPECIAL BETON

Péetrographie : CALCAIRE DUR VISEEN
Elaboration : RECOMPOSE
Usage : GRANULATS POUR BETONS HYDRAULIQUES

Résultats de production

du 05/07/18 au 04/12/18																			
	0.063	0.08	0.125	0.25	0.5	1	2	4	5	6.3	8	10	12.5	14	16	20	28	31.5	MB
Maximum	5.54	5.80	7.06	20.16	37.61	40.92	46.28	54.86	60.11	65.37	73.48	82.29	93.94	98.78	100.00	100.00	100.00	100.00	0.60
Xf+1.25xEcart-types	5.47	5.75	6.94	20.45	35.87	39.34	45.02	54.25	59.40	64.90	72.87	82.01	93.46	98.56	100.00	100.00	100.00	100.00	0.55
Moyenne Xf	4.43	4.68	5.68	16.16	33.09	36.61	42.07	51.09	55.85	61.82	69.99	79.30	92.34	98.04	99.95	100.00	100.00	100.00	0.34
Xf-1.25xEcart-types	3.40	3.60	4.42	11.87	30.31	33.89	39.11	47.93	52.30	58.74	67.11	76.59	91.23	97.52	99.81	100.00	100.00	100.00	0.13
Minimum	3.06	3.40	4.39	11.30	31.40	34.42	39.60	47.59	52.13	57.59	67.01	75.73	91.16	97.57	99.72	100.00	100.00	100.00	0.10
Ecart-type	0.826	0.857	1.006	3.433	2.222	2.180	2.364	2.527	2.838	2.464	2.301	2.170	0.892	0.414	0.111	0.000	0.000	0.000	0.166
Nombre de résultats	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17

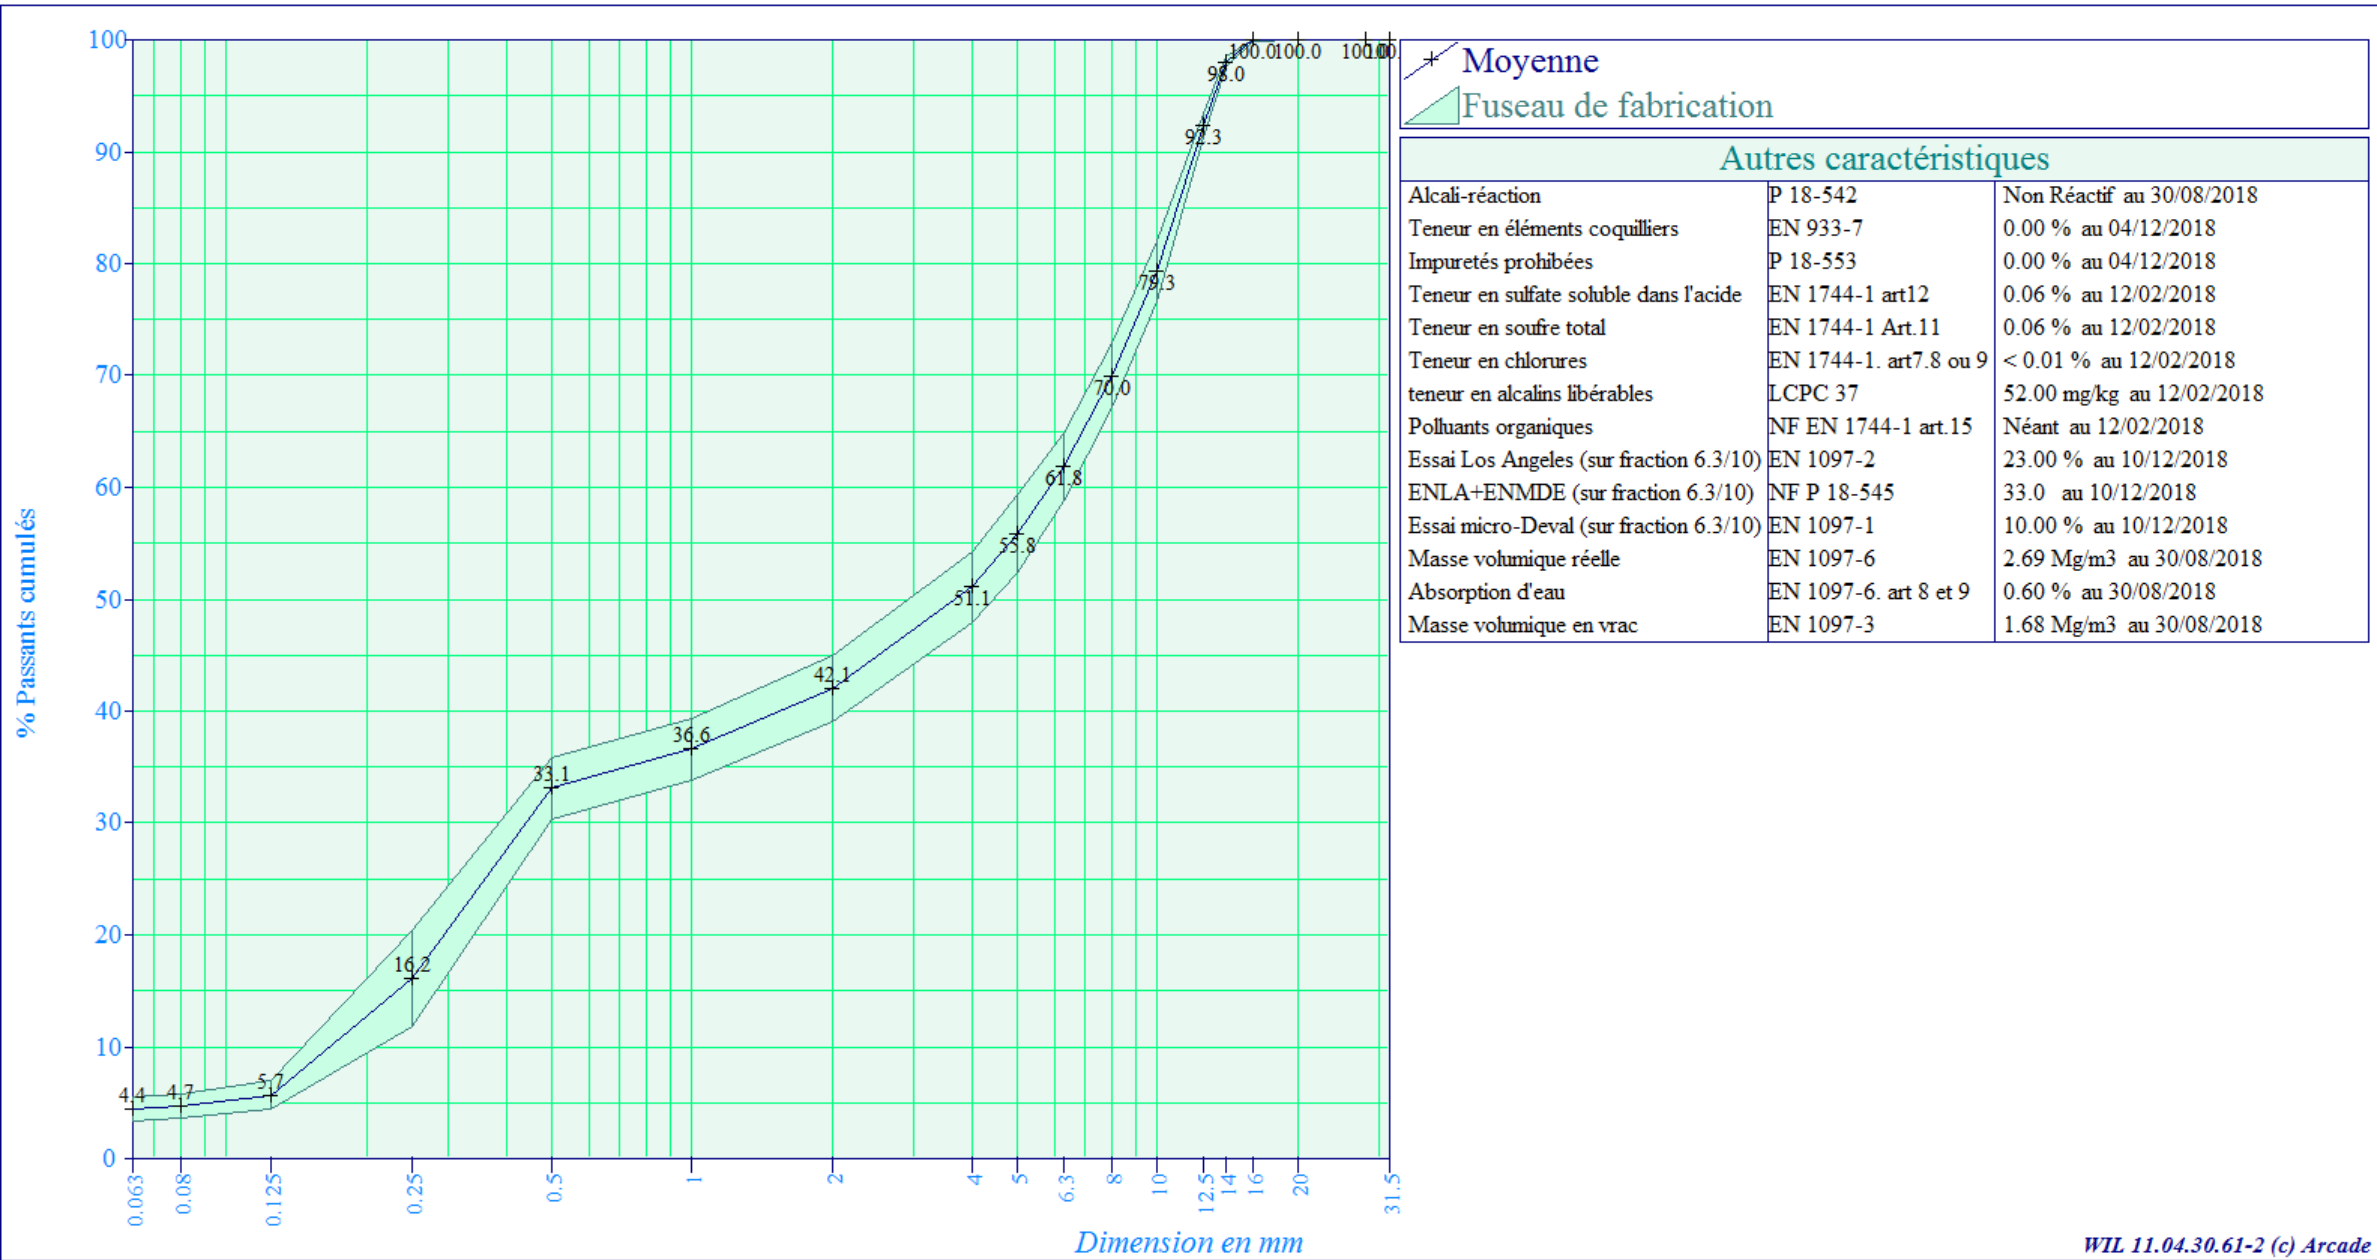

le Responsable Laboratoire

E. COLIN