

GRAVILLON 10/14 mm LAVE



Péetrographie : CALCAIRE DUR VISEEN

Partie contractuelle

Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire

Norme

Code

10 14

Norme NF P 18-545 Article 10

A (01/01/2012)


	0.063	0.5	d/2 5	6.3	8	d 10	12.5	D 14	16	20	1.4D 20	2D 28	FI
Etendue e	1.5		5			10		10		2	0		
Incertitude U	0.3		1			5		5		1	0		4
V.S.S.+U	1.8		6			18		95		100	100		24.00
V.S.S.	1.5		5			13		90		100	100		20.00
V.S.I.	0.0		0			3		80		98	100		
V.S.I.-U	0.0		0			0		75		97	100		
Ecart-type max	0.45		1.52			3.03		3.03		0.61	0.00		

Partie informative

Résultats de production

du 10/01/18 au 28/06/18

	0.063	0.5	5	6.3	8	10	12.5	14	16	20	28	FI
Maximum	0.7	1	5	6	7	12	66	90	100	100	100	14.00
Xf+1.25xEcart-types	0.5	1	2	2	3	8	61	89	100	100	100	
Moyenne Xf	0.3	0	1	1	2	6	50	86	99	100	100	10.57
Xf-1.25xEcart-types	0.1	0	0	0	0	3	39	82	99	100	100	
Minimum	0.1	0	0	0	0	3	35	80	98	100	100	7.00
Ecart-type	0.16	0.2	0.7	0.9	1.2	1.9	8.7	2.8	0.5	0.0	0.0	2.195
Nombre de résultats	49	49	49	49	49	49	49	49	49	49	49	7

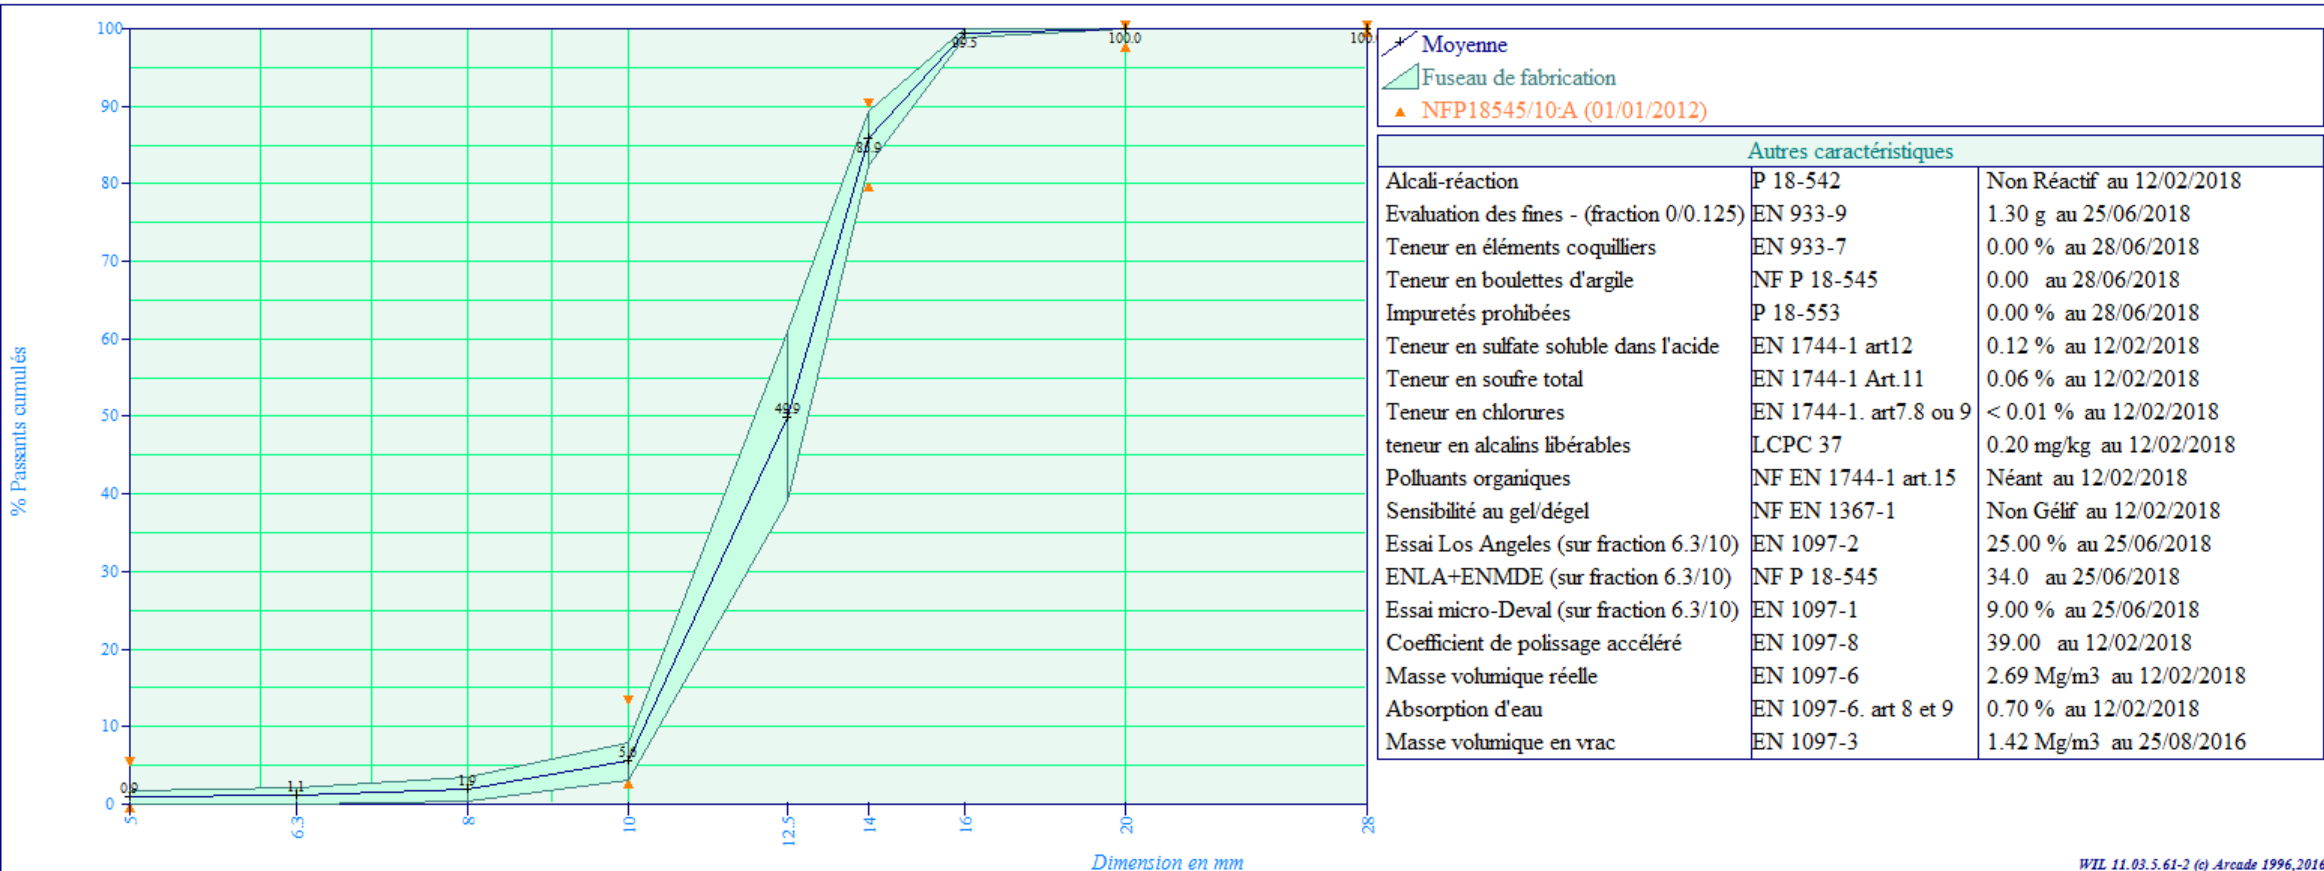

le Responsable Laboratoire

E. COLIN